

BLADE THICKNESS		AXLE ϕ
DAMPER DIA.	MAT'L Ga.	SIZE
18" - 36" ϕ	14 Ga.	1" DIA.
38" - 48" ϕ	12 Ga.	1" DIA.

HOUSING THICKNESS	
DAMPER DIA.	MAT'L Ga.
18" - 30" ϕ	18 Ga.
32" - 36" ϕ	16 Ga.
38" - 48" ϕ	14 Ga.

HAND WHEEL WITH GEAR DRIVE



EXTERNAL BEARING TYP. OF 2

304 SST ANGLE RING

1" ϕ SOLID SST SHAFT

HORIZONTAL FLOW

WITH CHAIN WHEEL AND LOCKOUT BY OTHERS

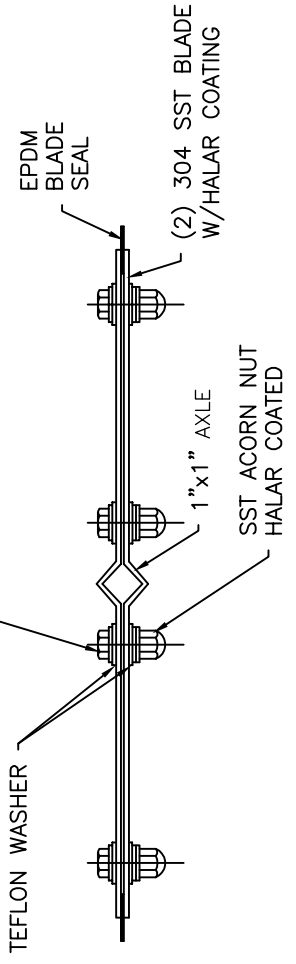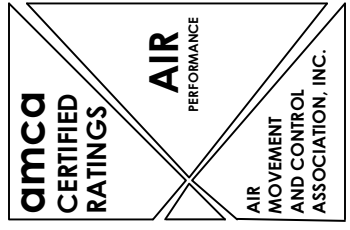

section A-A

STATIC PRESSURE
 -6" WG -10" WG
 OTHER: _____

PART NO.	DAMPER DIA.	QTY.
	18" ϕ	
	20" ϕ	
	22" ϕ	
	24" ϕ	
	26" ϕ	
	28" ϕ	
	30" ϕ	
	32" ϕ	
	34" ϕ	
	36" ϕ	
	38" ϕ	
	40" ϕ	
	42" ϕ	
	44" ϕ	
	46" ϕ	
	48" ϕ	

18" - 48" DIAMETER 304 SST/HALAR INDUSTRIAL LOW LEAKAGE BUTTERFLY DAMPER WITH HAND WHEEL



VIRON[®] INTERNATIONAL CORP.
 OWOSSO, MICHIGAN TEMPLE, TEXAS
 989-723-8255
 989-723-8417 FAX EMAIL: vironinfo@vironintl.com
 ENVIROMENTAL CONTROL SYSTEMS

USER	REP.	JOB NO.	DATE	SHEET	DF
DRAWN BY					