VIRON INTERNATIONAL CORP.
OWOSSO, MICHIGAN TEMPLE, TEXAS
989-723-8255
989-723-8417 FAX EMAIL: vironinfo@vironintl.com
ENVIRON MENTAL CONTROL SYSTEMS

| USER | |
|---|---|
| REP. | |
| JOB NO. | |
| DATE | SHEET OF |
| DRAWN BY | |

# STANDARD DIAMETERS "A" = 4"-120"

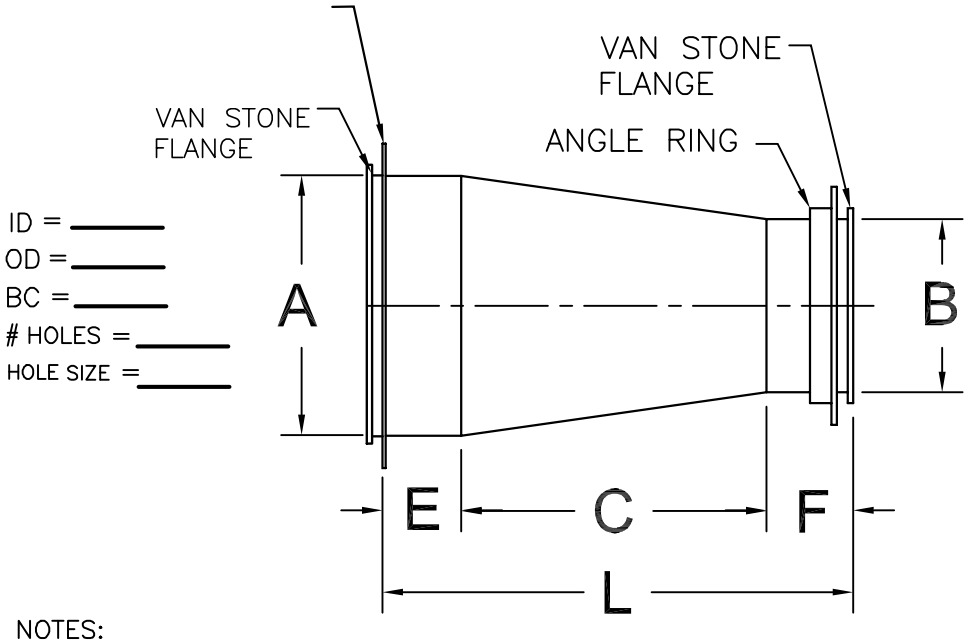


| STANDARD LENGTHS | |
|---|---|
| A - B | C |
| 9 & UNDER | 12" |
| 10" TO 14" | 14" |
| 16" TO 18" | 24" |
| 20" TO 24" | 30" |

NOTES:
1. ☐ 304L ☐ 316 L SST MATERIAL WITH 2B FINISH.
2. 304 SST ANGLE RINGS DRILLED
3. HALAR COATING, INTERIOR ONLY.
4. TIG WELDS ONLY.
5. FUSION WELDS ON ALL LONGITUDINAL SEAMS.
6. E & F REQUIRE A 3" MIN. LENGTH.

STATIC PRESSURE

☐ -6"WG ☐ -10"WG

OTHER: _____

| PART NUMBER | DESCRIPTION | | | | | | GA | QTY | REMARKS |
|---|---|---|---|---|---|---|---|---|---|
| | A | B | C | E | F | L | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

# SSTEELCOAT® CONCENTRIC REDUCER w/FLG.