

# VIRON<sup>®</sup> INTERNATIONAL CORP.


OWOSSO, MICHIGAN    TEMPLE, TEXAS  
 989-723-8255  
 989-723-8417 FAX    EMAIL: vironinfo@vironintl.com  
 ENVIRONMENTAL CONTROL SYSTEMS

USER	
REP.	
JOB NO.	
DATE	SHEET OF
DRAWN BY	

## STANDARD DIAMETERS & LENGTHS

- 4"Ø = 48" LONG
- 6"Ø - 16"Ø = 47¼" LONG
- 18"Ø - 120"Ø = 47" LONG

- NOTES:
1.  304L  316L SST MATERIAL WITH 2B FINISH.
  2. 304 SST ANGLE RINGS DRILLED
  3. HALAR COATING, INTERIOR ONLY.
  4. TIG WELDS ONLY.
  5. FUSION WELDS ON ALL LONGITUDINAL SEAMS.
  6. H REQUIRES A 6" MINIMUM LENGTH.
  7. F, M, S, Q, H & T REQUIRE A 4" MINIMUM LENGTH.

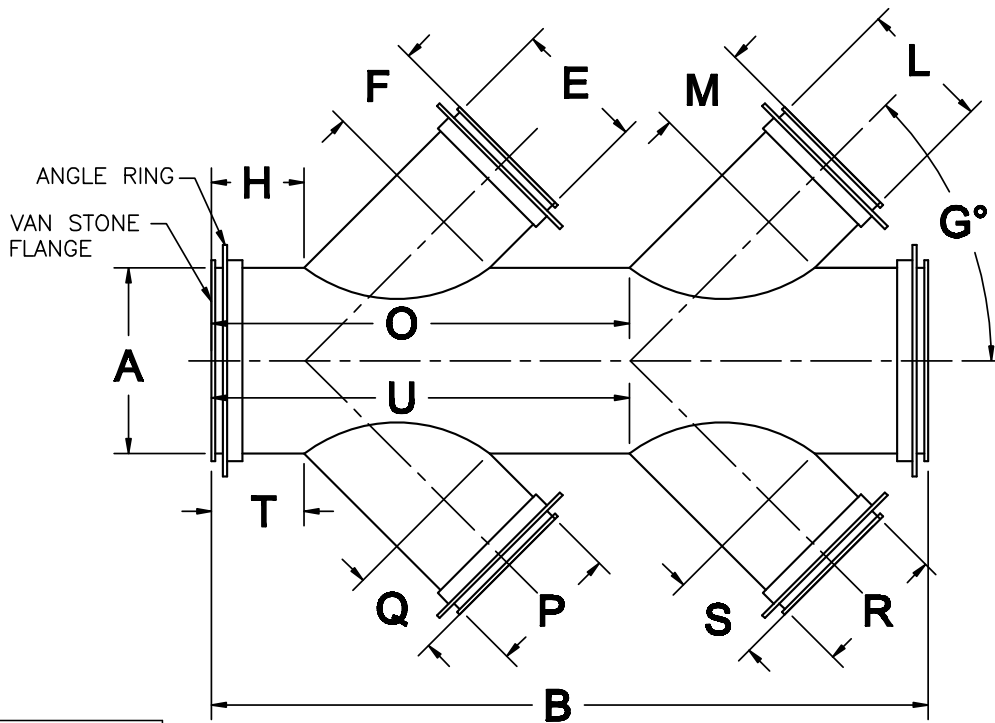

### STATIC PRESSURE

- 6"WG     -10"WG

OTHER: \_\_\_\_\_

PART NUMBER	DESCRIPTION									GA	QTY
	A	B	E	F	G°	H	L	M	O		
PART NUMBER	P	Q	R	S	T	U					

# SSTEELCOAT<sup>®</sup> QUAD TAP WYE