

VIRON[®] INTERNATIONAL CORP.

OWOSSO, MICHIGAN TEMPLE, TEXAS

989-723-8255

989-723-8417 FAX EMAIL: info@vironintl.com


ENVIRONMENTAL CONTROL SYSTEMS

USER	
REP.	
JOB NO.	
DATE	SHEET OF
DRAWN BY	

STANDARD DIAMETERS "D" = 4"-120"

OPTIONS

- * CUSTOM LENGTHS—CONTACT VIRON
- * MULTIPLE TAPS AVAILABLE
- * TAPS AVAILABLE OFFSET FROM CENTER

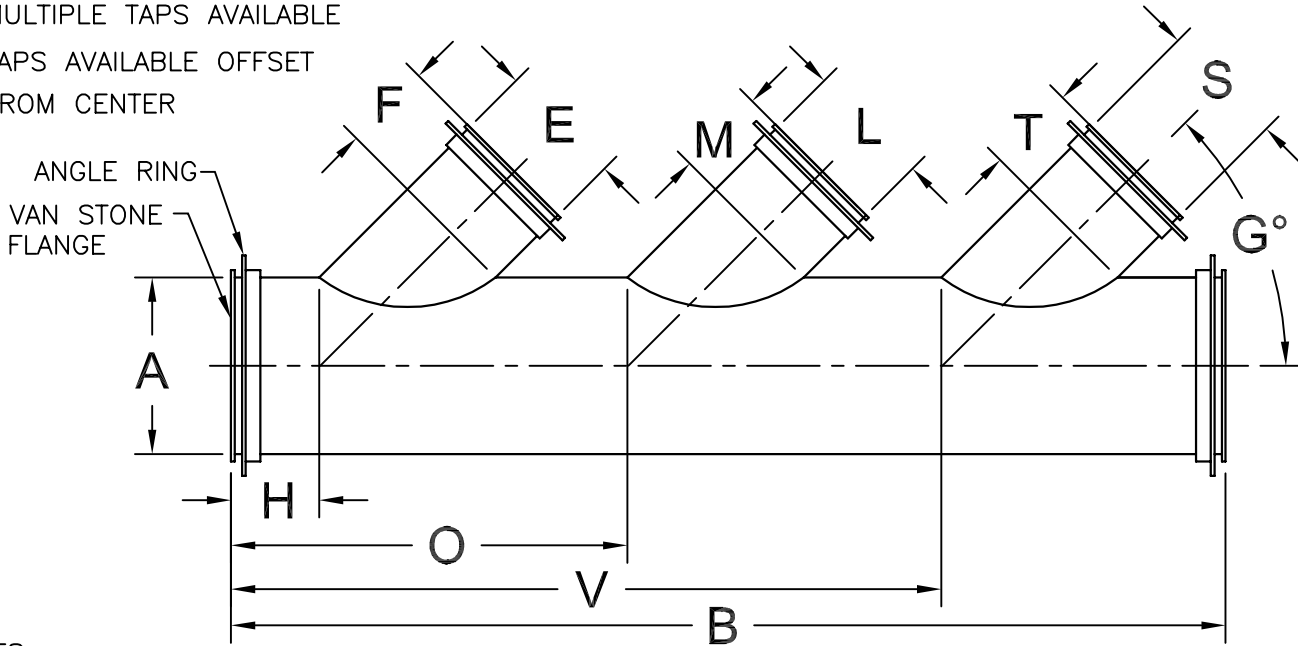

NOTES:

1. 300 SERIES SST MATERIAL WITH 2B FINISH.
2. 304 SST ANGLE RINGS DRILLED
3. HALAR COATING, INTERIOR ONLY.
4. TIG WELDS ONLY.
5. FUSION WELDS ON ALL LONGITUDINAL SEAMS.
6. H REQUIRES A 6" MINIMUM LENGTH.
7. F, M & T REQUIRE A 4" MINIMUM LENGTH.

STATIC PRESSURE

-6"WG -10"WG

OTHER: _____

PART NUMBER	DESCRIPTION									GA	QTY
	A	B	E	F	G	H	L	M	O		
PART NUMBER	S	T	V								

SSTEELCOAT[®] TRIPLE WYE