
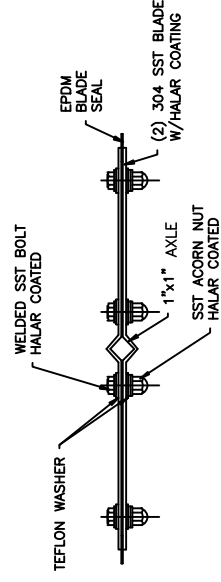


BLADE THICKNESS		AXLE ϕ	
DAMPER DIA.	MAT'L Ga.	SIZE	1" DIA.
18"-36"	14 Ga.	1" DIA.	
38"-48"	12 Ga.	1" DIA.	

HOUSING THICKNESS	
DAMPER DIA.	MAT'L Ga.
18"-30"	18 Ga.
32"-36"	16 Ga.
38"-48"	14 Ga.

18" ϕ - 36" ϕ DAMPER HANDLE

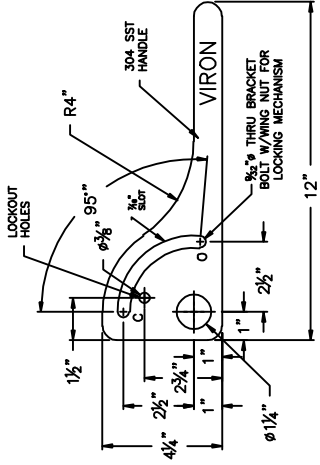

section A-A

NOTE:
1. ALL SST MATERIAL IN THE AIRSTREAM WILL HAVE HALAR COATING.

PART NO.	DIA.	QTY.
	18" ϕ	
	20" ϕ	
	22" ϕ	
	24" ϕ	
	26" ϕ	
	28" ϕ	
	30" ϕ	
	32" ϕ	
	34" ϕ	
	36" ϕ	
	38" ϕ	
	40" ϕ	
	42" ϕ	
	44" ϕ	
	46" ϕ	
	48" ϕ	

STATIC PRESSURE
 -6" W.G.
 -10" W.G.
 -30" W.G.

USER _____
 REF. _____
 JOB NO. _____
 DATE _____ SHEET _____ OF _____
 DRAWN BY _____



VIRON INTERNATIONAL CORP.
 CWOSSO, MICHIGAN TEMPLE, TEXAS
 989-723-8255
 989-723-8417 FAX EMAIL: vironinfo@vironintl.com
 ENVIRON MENTAL CONTROL SYSTEMS

18"-48" DIAMETER 304 SST/HALAR INDUSTRIAL LOW LEAKAGE BUTTERFLY DAMPER